



Reaming head

CRH 3

Reaming diameter

950 mm 37 3/8" for 7 7/8" pilot hole

1060 mm 41 3/4" for 9-12 1/4" pilot hole

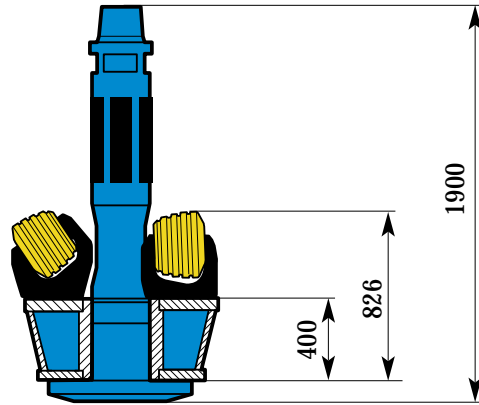

Pilot Hole		Stem		Head Part No.		Saddles	
in	mm	Part No.	Thread	Without saddles	With saddles	Pcs	Part No.
7 7/8	200	7008-3220-10	5 3/4" DI-22	7008-1009-20	7008-1009-30	2 2	7008-2004 7008-2003
9	229	7008-3323-30	6 3/4" DI-22	7008-1310-20	7008-1310-31	1	7008-2013
9 7/8	251	7008-3325-30				1 2	7008-2006 7008-2003
11	279	7008-3428-30	8 1/4" DI-22	7008-1310-20	7008-1310-30	2	7008-2006
12 1/4	311	7008-3431-30	8 1/4" DI-22			2	7008-2003
		7008-3531-30	9 1/4" DI-22				

Required cutters for different spacing						
Pilot hole	Rock condition	Spacing		Cutter Type	Cutter Part No.	Number
		mm	in			
7 7/8" 11-12 1/4"	Soft to medium	51	2	CMR-41	7008-4141-76	2
				CMR-52	7008-4152-76	2
9-9 7/8"	Medium to hard	25.5	1	CMR-41	7008-4141-76	2
				CMR-52	7008-4152-76	2
	Soft to medium	51	2	CMR-41	7008-4141-76	1
				CMR-52	7008-4152-76	3
Medium to hard	25.5	1	CMR-41	7008-4141-76	1	
			CMR-52	7008-4152-76	3	

Weights Ø 950	Kg	lb
Stem 7 7/8"	400	880
Head	350	770
Saddles	300	660
Cutters	400	880
Total	1450	3190

Weights Ø 1060	Kg	lb
Stem 12 1/4"	1200	2650
Head	7000	1540
Saddles	300	660
Cutters	400	880
Total	2600	5730