



Reaming head

CRH 5

Reaming diameter

1524 mm

60"

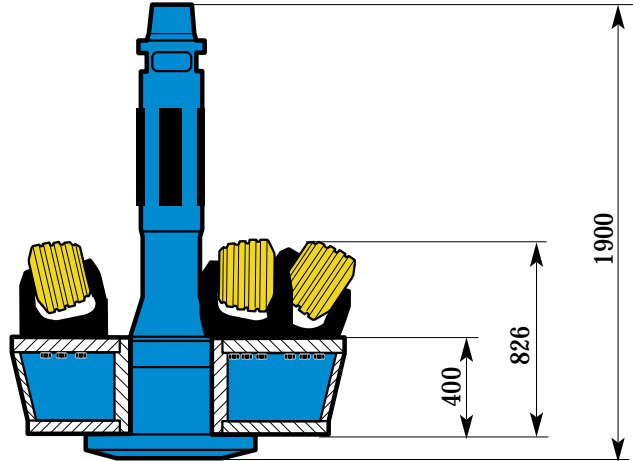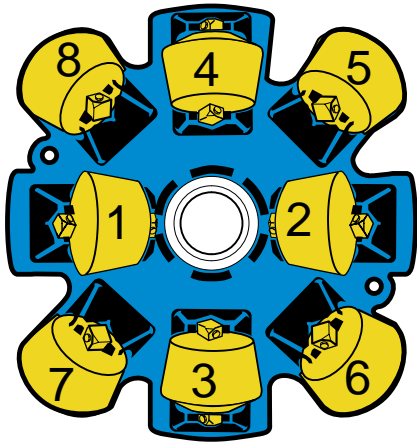

Pilot Hole		Stem		Head Part No.		Saddles	
in	mm	Part No.	Thread	Without saddles	With saddles	Pcs	Part No.
9	229	7008-3323-30	6 3/4" DI-22	7008-1315-20	7008-1315-31	1	7008-2013
9 7/8	251	7008-3325-30				1	7008-2006
11	279	7008-3428-30	8 1/4" DI-22	7008-1315-20	7008-1315-30	2	7008-2005
12 1/4	311	7008-3431-30	8 1/4" DI-22			4	7008-2007
		7008-3531-30	9 1/4" DI-22			2	7008-2006
						2	7008-2005
						4	7008-2007

Required cutters for different spacing						
Pilot hole	Rock condition	Spacing		Cutter Type	Cutter Part No.	Pcs
		mm	in			
9-9 7/8"	Soft to medium	51	2	CMR-41 CMR-52	7008-4141-76 7008-4152-76	2 6
	Medium to hard	25.5	1	CMR-41 CMR-52	7008-4141-76 7008-4152-76	2 6
11-12 1/4"	Soft to medium	51	2	CMR-41 CMR-52	7008-4141-76 7008-4152-76	1 7
	Medium to hard	25.5	1	CMR-41 CMR-52	7008-4141-76 7008-4152-76	3 5

Weights	Kg	lb
Stem 12 1/4"	1200	2650
Head	1450	3200
Saddles	600	1320
Cutters	800	1760
Total	4050	8930