
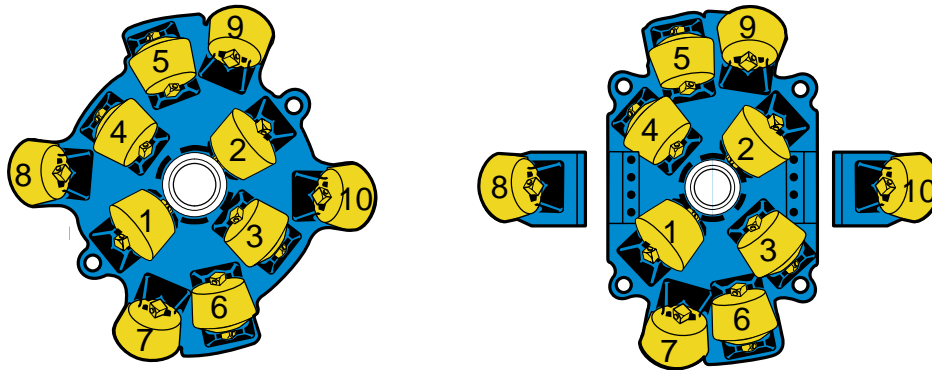


Reaming head CRH 6/6S

Reaming diameter
1829 mm
72"

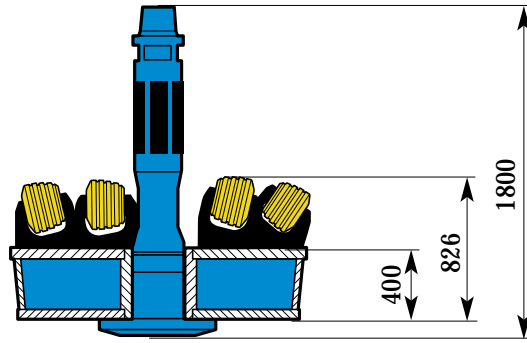

Pilot Hole		Reaming head	Integral head		Segmented head		Complete	Complete
in	mm	Type	Without saddles Part No.	With saddles Part No.	Base head Part No.	Segment Part No.	Without saddles Part No.	With saddles Part No.
9	229	CRH 6 CRH 6S	7008-1018-20 -	7008-1018-31 -	- 7008-1418-21	- 7008-2101-30	- 7008-1418-20	- 7008-1418-31
9 7/8	251	CRH 6 CRH 6S	7008-1018-20 -	7008-1018-31 -	- 7008-1418-21	- 7008-2101-20	- 7008-1418-20	- 7008-1418-31
11	279	CRH 6 CRH 6S	7008-1018-20 -	7008-1018-30 -	- 7008-1418-21	- 7008-2101-20	- 7008-1418-20	- 7008-1418-30
12 1/4	311	CRH 6 CRH 6S	7008-1018-20 -	7008-1018-30 -	- 7008-1418-21	- 7008-2101-20	- 7008-1418-20	- 7008-1418-30

Pilot Hole		Stem	Saddles		
in	mm	Part No.	Thread	Pcs	Part No.
9	229	7008-3323-30	6 3/4" DI-22	1	7008-2013
				1	7008-2006
9 7/8	251	7008-3225-30	6 3/4" DI-22	4	7008-2005
				4	7008-2007
11	279	7008-3428-30	8 1/4" DI-22	2	7008-2006
				4	7008-2005
12 1/4	311	7008-3431-30	8 1/4" DI-22	4	7008-2005
				4	7008-2007
		7008-3531-30	9 1/4" DI-22	4	7008-2007

Weights CRH 6	Kg	lb
Stem 12 1/4"	1200	2650
Head	1900	4190
Saddles	750	1650
Cutters	1000	2200
Total	4850	10690

Weights CRH 6S	Kg	lb
Stem 12 1/4"	1200	2650
Base head	1700	3750
Segments	300	660
Saddles	750	1650
Cutters	1000	2200
Total	4950	10910

Required cutters for different spacing						
Pilot hole	Rock condition	Spacing mm	in	Cutter Type	Cutter Part No.	Pcs
9-9 7/8"	Soft to medium	51	2	CMR-41	7008-4141-76	5
				CMR-52	7008-4152-76	5
	Medium to hard	25.5	1	CMR-41	7008-4141-76	4
				CMR-52	7008-4152-76	6
11-12 1/4"	Soft to medium	51	2	CMR-41	7008-4141-76	4
				CMR-52	7008-4152-76	6
	Medium to hard	25.5	1	CMR-41	7008-4141-76	5
				CMR-52	7008-4152-76	5