


Reaming head CRH 10E

Reaming diameter
3130 3500 3687 3824 4042 mm
123" 138" 145" 150" 159"

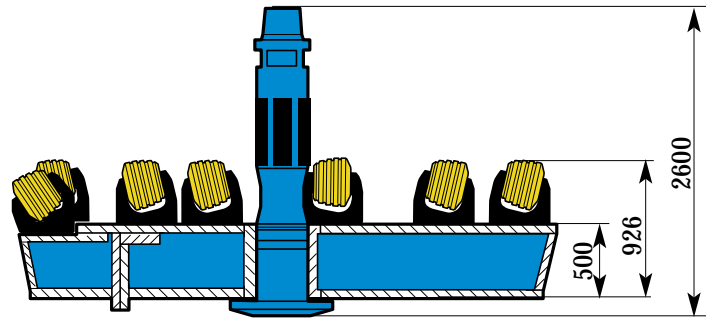

Reaming diameter		Base head (Possible option)				Required number of segments								Total weight	
in	mm	Part No. 7008-xxxx-20				Part No. 7008-xxxx-20								kg	lb
		1031	1331	1440	1340	2109	2110	2111	2144	2145	2152	2153			
123	3130	Yes	Yes										11100	24450	
138	3500	Yes	Yes	Yes	Yes	2	2						13550	29850	
145	3687			Yes	Yes						2	2	15050	33150	
150	3824	Yes	Yes	Yes	Yes	2	2	2					14750	32500	
159	4042			Yes	Yes				2	2			16850	37125	

Note: Other diameters on request

Base head 7008-1031-20 & 7008-1440-20 with Ø 360 mm stem fit

Pilot hole Ø		Stem with Ø 360 mm stem fit (-4X)		Wrench flat type
in	mm	Part No.	Thread	
12 1/4	311	7008-3531-40	9 1/4" DI-22	-
13 3/4	349	7008-3634-40	10 1/2" DI-22	2 x triangular
13 3/4	349	7008-3634-41	10 1/2" DI-22	Triangular
13 3/4	349	7008-3634-42	10 1/2" DI-22	10 1/2" square
13 3/4	349	7008-3634-43	10 1/2" DI-22	10" square

Weights	Part No.	Kg	lb
Stem 13 3/4"	7008-3634-40	1800	3970
Base head	7008-1031-20	6500	14300
Segment	2109	300	660
7008-XXXX-20	2110	750	1650
	2111	425	940
	2144	1350	2975
	2145	2800	6170
	2152	1800	3965
	2153	950	2095
Cutter		125	275
Saddle		75	165


Base head 7008-1331-20 & 7008-1340-20 with Ø 390 mm stem fit

Pilot hole Ø		Stem with Ø 390 mm stem fit (-5X)		Wrench flat type
in	mm	Part No.	Thread	
13 3/4	349	7008-3634-50	10 1/2" DI-22	2 x triangular
13 3/4	349	7008-3634-51	10 1/2" DI-22	Triangular
13 3/4	349	7008-3634-52	10 1/2" DI-22	10 1/2" square
13 3/4	349	7008-3634-53	10 1/2" DI-22	10" square
15	381	7008-3638-54	10 1/2" DI-22	-
15	381	7008-3638-5401	10 1/2" DI-22	10" square


Required cutters for different spacing & reamer diameter									
Rock condition	Spacing		Cutter Type	Cutter Part No.	3130	3500	3687	3824	4042
	mm	in							
Soft to medium	51	2	CMR-41	7008-4141-76	8	10	10	10	12
			CMR-52	7008-4152-76	8	8	10	10	10
Medium to hard	25.5	1	CMR-41	7008-4141-76	8	9	10	10	11
			CMR-52	7008-4152-76	8	9	10	10	11
Total number of cutters per diameter					16	18	20	20	22

Note: Other cutter types as per p. 4-5 on request


Ø 3130

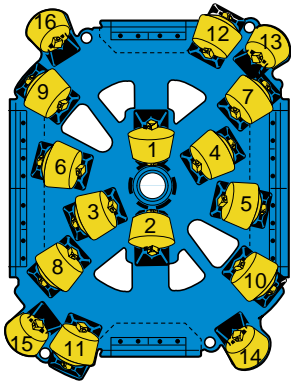


Ø 3500

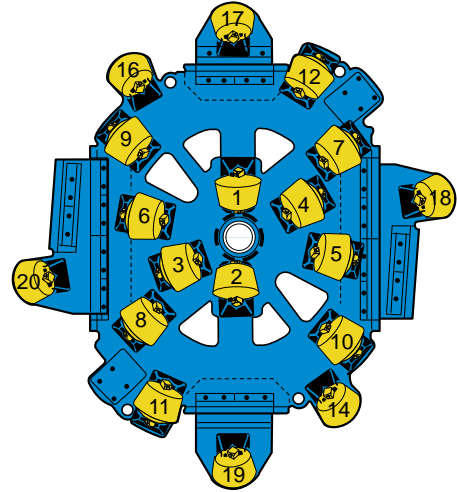

Ø 3687

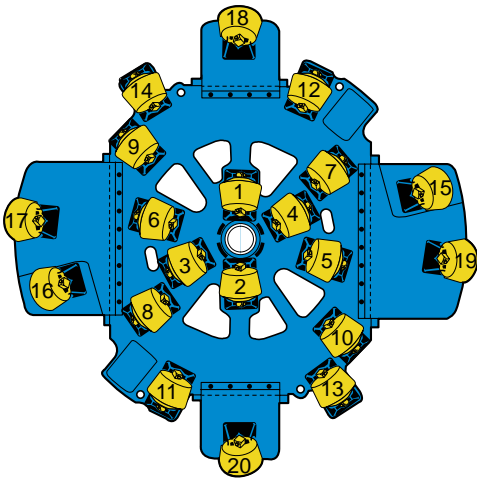

Ø 3824

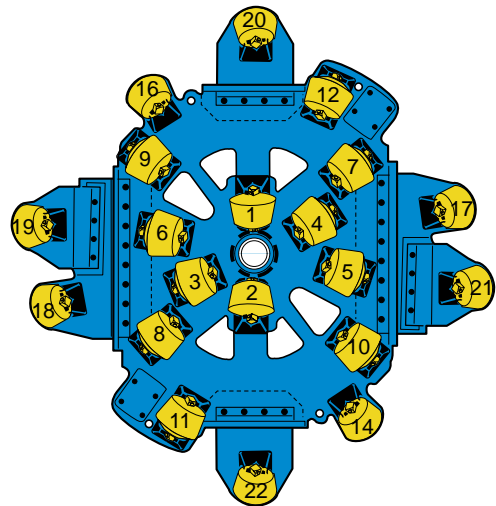

Ø 4042

